
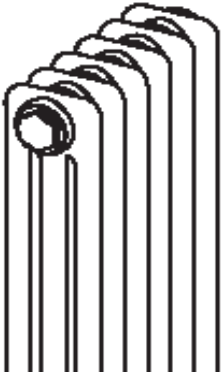


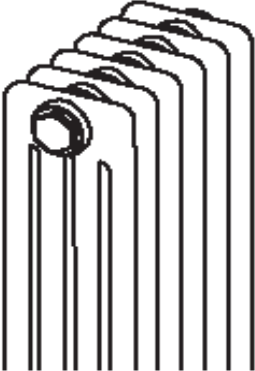
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
2-трубчатый, T=65 мм 	2019	190	120	18	1,23	0,33	66	2970	17,52
	2026	260	190	25	1,25	0,42	66	2970	18,00
	2030	300	230	30	1,26	0,47	66	2970	18,31
	2035	350	280	35	1,31	0,53	66	2970	18,67
	2040	400	330	40	1,31	0,59	66	2970	18,82
	2045	450	380	44	1,31	0,65	66	2970	19,32
	2050	500	430	49	1,31	0,71	66	2970	19,85
	2055	550	480	53	1,31	0,77	66	2970	20,18
	2057	570	500	53	1,30	0,80	66	2970	20,75
	2060	600	530	58	1,31	0,83	66	2970	20,79
	2075	750	680	71	1,31	1,02	66	2970	21,64
	2090	900	830	84	1,31	1,20	66	2970	23,04
	2100	1000	930	93	1,32	1,32	66	2970	24,12
	2110	1100	1030	102	1,32	1,44	66	2970	25,08
	2120	1200	1130	111	1,32	1,56	66	2970	26,76
	2150	1500	1430	138	1,32	1,93	66	2970	34,22
	2180	1800	1730	164	1,32	2,29	66	2970	40,45
	2200	2000	1930	182	1,32	2,53	66	2970	45,26
	2220	2200	2130	199	1,32	2,78	42	1890	50,79
2250	2500	2430	226	1,32	3,14	42	1890	56,32	
2280	2800	2730	253	1,33	3,50	42	1890	63,39	
2300	3000	2930	271	1,33	3,75	42	1890	67,73	

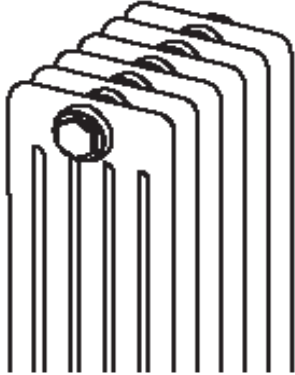
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	PC за элемент RAL 9016, Евро	
3-трубчатый, T=105 мм 	3019	190	120	25	1,27	0,50	66	2970	18,68
	3026	260	190	35	1,31	0,63	66	2970	19,37
	3030	300	230	41	1,33	0,70	66	2970	19,88
	3035	350	280	48	1,36	0,79	66	2970	20,48
	3037	370	300	48	1,30	0,83	66	2970	21,13
	3040	400	330	55	1,36	0,88	66	2970	21,16
	3045	450	380	61	1,36	0,97	66	2970	21,69
	3050	500	430	68	1,36	1,06	66	2970	22,35
	3055	550	480	74	1,36	1,16	66	2970	23,01
	3057	570	500	73	1,30	1,19	66	2970	23,70
	3060	600	530	80	1,36	1,25	66	2970	23,73
	3075	750	680	99	1,36	1,52	66	2970	25,43
	3090	900	830	117	1,36	1,79	66	2970	27,39
	3100	1000	930	130	1,36	1,98	66	2970	28,71
	3110	1100	1030	141	1,35	2,16	66	2970	32,25
	3120	1200	1130	152	1,35	2,34	66	2970	37,71
	3150	1500	1430	187	1,35	2,89	66	2970	48,91
	3180	1800	1730	219	1,35	3,43	66	2970	60,33
	3200	2000	1930	241	1,34	3,80	59	2655	64,65
	3220	2200	2130	262	1,34	4,16	59	2655	73,62
3250	2500	2430	293	1,34	4,71	30	1350	82,57	
3280	2800	2730	323	1,34	5,25	30	1350	91,96	
3300	3000	2930	341	1,33	5,62	30	1350	99,55	

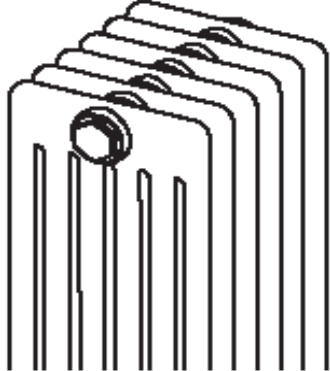
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔТ 60К 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	PC за элемент RAL 9016, Евро	
4-трубчатый, T=145 мм									
	4019	190	120	33	1,25	0,66	66	2970	21,16
	4026	260	190	46	1,30	0,84	66	2970	21,59
	4030	300	230	54	1,33	0,93	66	2970	21,98
	4035	350	280	63	1,35	1,06	66	2970	22,75
	4040	400	330	71	1,35	1,18	66	2970	23,20
	4045	450	380	79	1,35	1,30	66	2970	24,18
	4050	500	430	87	1,35	1,42	66	2970	24,90
	4055	550	480	95	1,35	1,54	66	2970	25,98
	4060	600	530	103	1,35	1,66	66	2970	26,85
	4075	750	680	126	1,35	2,03	66	2970	30,50
	4090	900	830	148	1,35	2,39	66	2970	35,16
	4100	1000	930	164	1,35	2,63	66	2970	38,00
	4110	1100	1030	179	1,35	2,88	66	2970	41,98
	4120	1200	1130	193	1,35	3,12	66	2970	47,44
	4150	1500	1430	236	1,35	3,85	54	2430	63,90
	4180	1800	1730	277	1,34	4,58	54	2430	76,78
	4200	2000	1930	305	1,34	5,06	44	1980	85,05
4220	2200	2130	332	1,34	5,55	44	1980	95,57	
4250	2500	2430	371	1,34	6,27	30	1350	106,21	
4280	2800	2730	409	1,34	7,00	30	1350	120,18	
4300	3000	2930	434	1,34	7,49	30	1350	128,66	

Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔТ 60К 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	PC за элемент RAL 9016, Евро	
5-трубчатый, T=185мм									
	5018	180	110	40	1,29	0,89	66	2970	26,19
	5026	260	190	56	1,33	1,11	66	2970	26,32
	5030	300	230	67	1,36	1,23	66	2970	26,28
	5035	350	280	78	1,39	1,38	66	2970	26,79
	5040	400	330	88	1,39	1,53	66	2970	27,65
	5045	450	380	98	1,39	1,68	66	2970	28,87
	5050	500	430	108	1,39	1,83	66	2970	29,43
	5055	550	480	118	1,39	1,99	66	2970	30,50
	5060	600	530	128	1,39	2,14	66	2970	31,89
	5075	750	680	157	1,39	2,59	66	2970	36,71
	5090	900	830	184	1,39	3,05	66	2970	41,62
	5100	1000	930	202	1,38	3,35	66	2970	44,37
	5110	1100	1030	219	1,38	3,65	44	1980	51,49
	5120	1200	1130	237	1,38	3,96	44	1980	59,58
	5150	1500	1430	286	1,37	4,87	30	1350	80,01
	5180	1800	1730	335	1,37	5,78	30	1350	94,14
	5200	2000	1930	365	1,37	6,38	30	1350	104,11
	5220	2200	2130	394	1,36	6,99	30	1350	117,05
5250	2500	2430	436	1,36	7,90	30	1350	129,88	
5280	2800	2730	474	1,35	8,81	26	1170	144,43	
5300	3000	2930	500	1,35	9,42	26	1170	154,57	

Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
6-трубчатый, T=225 мм 	6018	180	110	49	1,31	1,08	66	2970	30,31
	6026	260	190	67	1,36	1,34	66	2970	30,64
	6030	300	230	79	1,39	1,49	66	2970	30,69
	6035	350	280	92	1,41	1,67	66	2970	31,57
	6040	400	330	104	1,41	1,85	66	2970	32,51
	6045	450	380	115	1,41	2,03	66	2970	33,75
	6050	500	430	127	1,41	2,21	66	2970	34,61
	6055	550	480	138	1,41	2,40	66	2970	36,23
	6060	600	530	150	1,41	2,58	66	2970	37,58
	6075	750	680	183	1,40	3,12	66	2970	42,83
	6090	900	830	215	1,40	3,67	66	2970	48,20
	6100	1000	930	237	1,40	4,03	58	2610	51,96
	6110	1100	1030	257	1,40	4,40	44	1980	61,26
	6120	1200	1130	278	1,40	4,76	44	1980	69,40
	6150	1500	1430	338	1,40	5,85	30	1350	95,32
	6180	1800	1730	395	1,39	6,95	30	1350	111,82
	6200	2000	1930	433	1,39	7,67	30	1350	123,26
	6220	2200	2130	469	1,39	8,40	22	990	138,86
	6250	2500	2430	521	1,39	9,49	22	990	154,57
6280	2800	2730	571	1,38	10,59	22	990	173,61	
6300	3000	2930	605	1,38	11,31	22	990	184,84	