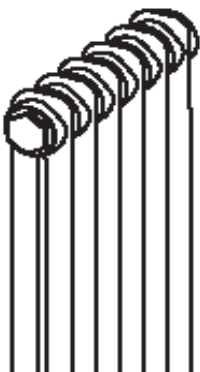
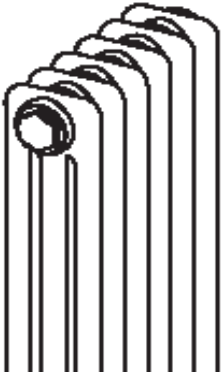


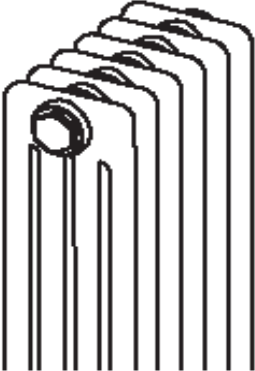
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
<p>2-трубчатый, T=65 мм</p> 	2019	190	120	18	1,23	0,33	66	2970	19,66
	2026	260	190	25	1,25	0,42	66	2970	20,22
	2030	300	230	30	1,26	0,47	66	2970	20,56
	2035	350	280	35	1,31	0,53	66	2970	20,97
	2040	400	330	40	1,31	0,59	66	2970	21,15
	2045	450	380	44	1,31	0,65	66	2970	21,70
	2050	500	430	49	1,31	0,71	66	2970	22,29
	2055	550	480	53	1,31	0,77	66	2970	22,67
	2057	570	500	53	1,30	0,80	66	2970	23,31
	2060	600	530	58	1,31	0,83	66	2970	23,34
	2075	750	680	71	1,31	1,02	66	2970	24,30
	2090	900	830	84	1,31	1,20	66	2970	25,88
	2100	1000	930	93	1,32	1,32	66	2970	27,08
	2110	1100	1030	102	1,32	1,44	66	2970	28,18
	2120	1200	1130	111	1,32	1,56	66	2970	30,06
	2150	1500	1430	138	1,32	1,93	66	2970	38,44
	2180	1800	1730	164	1,32	2,29	66	2970	45,44
	2200	2000	1930	182	1,32	2,53	66	2970	50,85
2220	2200	2130	199	1,32	2,78	42	1890	57,05	
2250	2500	2430	226	1,32	3,14	42	1890	63,27	
2280	2800	2730	253	1,33	3,50	42	1890	71,20	
2300	3000	2930	271	1,33	3,75	42	1890	76,08	

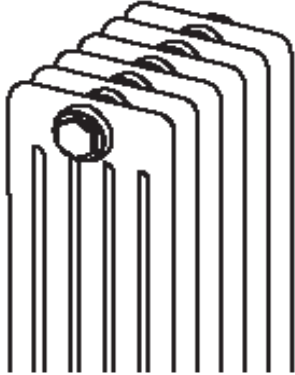
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
3-трубчатый, T=105 мм									
	3019	190	120	25	1,27	0,50	66	2970	20,98
	3026	260	190	35	1,31	0,63	66	2970	21,76
	3030	300	230	41	1,33	0,70	66	2970	22,31
	3035	350	280	48	1,36	0,79	66	2970	23,00
	3037	370	300	48	1,30	0,83	66	2970	23,73
	3040	400	330	55	1,36	0,88	66	2970	23,77
	3045	450	380	61	1,36	0,97	66	2970	24,35
	3050	500	430	68	1,36	1,06	66	2970	25,12
	3055	550	480	74	1,36	1,16	66	2970	25,84
	3057	570	500	73	1,30	1,19	66	2970	26,62
	3060	600	530	80	1,36	1,25	66	2970	26,64
	3075	750	680	99	1,36	1,52	66	2970	28,58
	3090	900	830	117	1,36	1,79	66	2970	30,76
	3100	1000	930	130	1,36	1,98	66	2970	32,26
	3110	1100	1030	141	1,35	2,16	66	2970	36,23
	3120	1200	1130	152	1,35	2,34	66	2970	42,37
	3150	1500	1430	187	1,35	2,89	66	2970	54,94
	3180	1800	1730	219	1,35	3,43	66	2970	67,76
3200	2000	1930	241	1,34	3,80	59	2655	72,60	
3220	2200	2130	262	1,34	4,16	59	2655	82,67	
3250	2500	2430	293	1,34	4,71	30	1350	92,74	
3280	2800	2730	323	1,34	5,25	30	1350	103,29	
3300	3000	2930	341	1,33	5,62	30	1350	111,82	

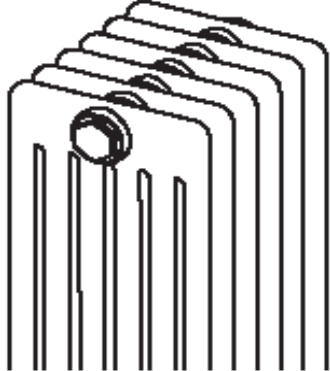
Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔТ 60К 90/70/20°С	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
4-трубчатый, T=145 мм									
	4019	190	120	33	1,25	0,66	66	2970	23,77
	4026	260	190	46	1,30	0,84	66	2970	24,26
	4030	300	230	54	1,33	0,93	66	2970	24,69
	4035	350	280	63	1,35	1,06	66	2970	25,55
	4040	400	330	71	1,35	1,18	66	2970	26,05
	4045	450	380	79	1,35	1,30	66	2970	27,16
	4050	500	430	87	1,35	1,42	66	2970	27,97
	4055	550	480	95	1,35	1,54	66	2970	29,18
	4060	600	530	103	1,35	1,66	66	2970	30,14
	4075	750	680	126	1,35	2,03	66	2970	34,26
	4090	900	830	148	1,35	2,39	66	2970	39,48
	4100	1000	930	164	1,35	2,63	66	2970	42,68
	4110	1100	1030	179	1,35	2,88	66	2970	47,15
	4120	1200	1130	193	1,35	3,12	66	2970	53,29
	4150	1500	1430	236	1,35	3,85	54	2430	71,78
	4180	1800	1730	277	1,34	4,58	54	2430	86,25
	4200	2000	1930	305	1,34	5,06	44	1980	95,54
4220	2200	2130	332	1,34	5,55	44	1980	107,35	
4250	2500	2430	371	1,34	6,27	30	1350	119,30	
4280	2800	2730	409	1,34	7,00	30	1350	134,99	
4300	3000	2930	434	1,34	7,49	30	1350	144,50	

Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔТ 60К 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
5-трубчатый, T=185мм									
	5018	180	110	40	1,29	0,89	66	2970	29,42
	5026	260	190	56	1,33	1,11	66	2970	29,57
	5030	300	230	67	1,36	1,23	66	2970	29,53
	5035	350	280	78	1,39	1,38	66	2970	30,09
	5040	400	330	88	1,39	1,53	66	2970	31,05
	5045	450	380	98	1,39	1,68	66	2970	32,41
	5050	500	430	108	1,39	1,83	66	2970	33,05
	5055	550	480	118	1,39	1,99	66	2970	34,26
	5060	600	530	128	1,39	2,14	66	2970	35,81
	5075	750	680	157	1,39	2,59	66	2970	41,22
	5090	900	830	184	1,39	3,05	66	2970	46,76
	5100	1000	930	202	1,38	3,35	66	2970	49,84
	5110	1100	1030	219	1,38	3,65	44	1980	57,84
	5120	1200	1130	237	1,38	3,96	44	1980	66,93
	5150	1500	1430	286	1,37	4,87	30	1350	89,88
	5180	1800	1730	335	1,37	5,78	30	1350	105,74
	5200	2000	1930	365	1,37	6,38	30	1350	116,94
	5220	2200	2130	394	1,36	6,99	30	1350	131,47
5250	2500	2430	436	1,36	7,90	30	1350	145,88	
5280	2800	2730	474	1,35	8,81	26	1170	162,21	
5300	3000	2930	500	1,35	9,42	26	1170	173,61	

Трубчатые радиаторы

Модель	H, мм	N, мм	Φ ΔT 60K 90/70/20°C	Exp., n	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
6-трубчатый, T=225 мм 	6018	180	110	49	1,31	1,08	66	2970	34,04
	6026	260	190	67	1,36	1,34	66	2970	34,42
	6030	300	230	79	1,39	1,49	66	2970	34,46
	6035	350	280	92	1,41	1,67	66	2970	35,45
	6040	400	330	104	1,41	1,85	66	2970	36,50
	6045	450	380	115	1,41	2,03	66	2970	37,90
	6050	500	430	127	1,41	2,21	66	2970	38,88
	6055	550	480	138	1,41	2,40	66	2970	40,71
	6060	600	530	150	1,41	2,58	66	2970	42,21
	6075	750	680	183	1,40	3,12	66	2970	48,12
	6090	900	830	215	1,40	3,67	66	2970	54,15
	6100	1000	930	237	1,40	4,03	58	2610	58,36
	6110	1100	1030	257	1,40	4,40	44	1980	68,81
	6120	1200	1130	278	1,40	4,76	44	1980	77,94
	6150	1500	1430	338	1,40	5,85	30	1350	107,06
	6180	1800	1730	395	1,39	6,95	30	1350	125,59
	6200	2000	1930	433	1,39	7,67	30	1350	138,46
	6220	2200	2130	469	1,39	8,40	22	990	155,97
	6250	2500	2430	521	1,39	9,49	22	990	173,61
6280	2800	2730	571	1,38	10,59	22	990	194,99	
6300	3000	2930	605	1,38	11,31	22	990	207,62	